

LOTFIX

MAKE BETTER CHOICES
ACHIEVE A BETTER LIFE



PRODUCT CATALOGUE

www.lotfixsealant.com

LOTFIX

Add: Dabu Industrial Zone, Sanshui Dist.,
Foshan, China

Tel: +86 757 8778 9216

WhatsApp/WeChat: +86 132 6598 0807

Email: info@lotfixsealant.com



www.lotfixsealant.com



COMPANY PROFILE

LOTFIX®, an one-stop sealants and adhesives solution provider in China, which is mainly producing and supplying various sealing and bonding products, including *silicone sealant, PU (polyurethane) foam, acrylic sealant, super glue and other sealants*. Specializes in high-performance products, delivering innovative bonding solutions for construction, automotive, and manufacturing industries.

Factory is located in Foshan, China. With a great management team for Production, R&D, Quality Control and Sales, the company has passed ISO:9001 certification and adhering to comprehensive quality management since its establishment, and main products are meet American & European standards. Till 2024, we have exported to countries in *Asia, the Middle East, Europe, Latin America, North America, Africa* and so on.




**WE ACT AS YOUR
LONG-TERM SEAMLESS PARTNER
WITH PREMIUM PRODUCTS
AND EXCELLENT SERVICE,
NOT JUST A SUPPLIER.**

WHAT WE DO

As our customers are at the heart of everything we do, we are always committed to ensuring there is a product that can meet your requirements, from colour, size, through to packaging options, we'll adapt our products to suit your project or sales needs. And thanks to our success with product quality, our sales network expand day by day and product range is growing.

- **STRONG PRODUCT COMPETITIVENESS**
- **QUALITY ASSURANCE**
- **FAST DELIVERY**
- **WORRY-FREE AFTER-SALES SERVICE**

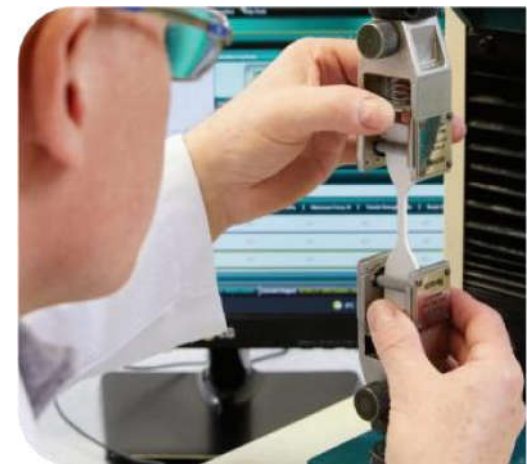

Our top priority is to create value for our customers, to respond promptly to their necessity with quality. In order to provide customers with more professional and comprehensive construction solutions, we has absorbed better development and management concepts, constantly understood market changes, and continuously optimized product development, quality control and price competitiveness.



LOTFIX® F21

GENERAL PURPOSE PU FOAM

LOTFIX® F21 is an one-component general purpose polyurethane foam which to be used by gun or manually. It is apply for windows & doors installations, gaps and holes filling, sound and thermal insulation etc. And it is self-expanding, cures and hardens with air moisture and adheres well to most construction materials.

KEY FEATURE:

- One component, ready-to-use.
- Good performance stability.
- Good filling and expanding capacity.
- Good sound and thermal insulation capacity.
- Good adhesion to most building materials such as wood, concrete, tiles, metal and aluminium (except PA, PE, silicone and Teflon).

PACKAGING:

- 750ml/can, 500ml/can and 300ml/can
- 15 cans/carton , 12 cans/carton, 6 cans/carton

SHELF LIFE:

12 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.

USES:

- For windows and doors installations.
- For filling gaps and all openings in all constructions.
- For thermal and sound insulation.
- For household DIY use.

LOTFIX® F22

MULTI-PURPOSE PU FOAM

LOTFIX® F22 is an one-component high quality multi-purpose polyurethane foam which to be used by gun or manually. It is ideal for fixing window and door frames, filling holes and cracks, and sealing gaps around pipe penetrations in walls, etc. Excellent adheres to most building materials, features high sound and thermal insulation properties.

KEY FEATURE:

- One component, ready-to-use.
- Excellent performance stability.
- Excellent filling and expanding capacity.
- Excellent sound and thermal insulation capacity.
- Excellent adhesion to most building materials such as wood, concrete, tiles, metal and aluminium (except PA, PE, silicone and Teflon).

PACKAGING:

- 750ml/can, 500ml/can and 300ml/can
- 15 cans/carton , 12 cans/carton, 6 cans/carton

SHELF LIFE:

12 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.





LOTFIX® F23

PROFESSIONAL GRADE PU FOAM

LOTFIX® F23 is an one-component premium quality professional grade polyurethane foam which yields significantly higher volumes. It is used with a gun, apply for installing window and door frames, sealing of gaps, joints and cavities, and insulating electrical outlets and water pipes., etc. Adheres perfectly to most building materials, features high sound and thermal insulation properties, ideal for professionals.

KEY FEATURE:

- One component, ready-to-use.
- High yield, high cost performance.
- Excellent filling and sealing capacity.
- Excellent sound and thermal insulation capacity.
- Excellent adhesion to most building materials such as wood, concrete, tiles, metal and aluminium (except PA, PE, silicone and Teflon).

PACKAGING:

- 750ml/can for Gun type
- 15 cans/carton , 12 cans/carton, 6 cans/carton

SHELF LIFE:

12 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.

USES:

- For installation of window and doors.
- For sealing of gaps, joints and cavities.
- For filling gaps around pipe penetrations in walls.
- Suitable for bonding wood, bricks, EPS/XPS and other materials.

LOTFIX® F30

PU ADHESIVE FOAM

LOTFIX® F30 is an one-component ready-to-use polyurethane adhesive foam which to be used by gun or manually. It is a bonding material that replaces cement-based adhesives, it is ideal for bonding all types of insulation materials and boards onto walls, it provides excellent adhesion to most building materials like insulation panels (EPS/XPS), styrofoam, bricks and blocks etc.

KEY FEATURE:

- One component, ready-to-use.
- Excellent adhesion to most building materials (except PA, PE, silicone and Teflon).
- Hardens quickly and fitter does not require any other tools.
- The construction time is shorter compared with cement-based adhesives.
- Lower costs, with one aerosol can, 10 m² of wall surface can be covered with insulation panels.

PACKAGING:

- 750ml/can, 500ml/can
- 15 cans/carton , 12 cans/carton, 6 cans/carton

SHELF LIFE:

12 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.



USES:

- For mounting heat insulation panels and filling gaps during adhesive application.
- Recommended for wooden type construction materials adhesion to concrete, metal etc.
- Mounting and isolation for frames of windows and doors.



LOTFIX® F32

PU SPRAY FOAM

LOTFIX® F32 is an one-component ready-to-use polyurethane adhesive foam which to be used by gun or manually. It is a bonding material that replaces cement-based adhesives, it is ideal for bonding all types of insulation materials and boards onto walls, it provides excellent adhesion to most building materials like insulation panels (EPS/XPS), styrofoam, bricks and blocks etc.

KEY FEATURE:

- Closed cell structure ensures durable and high-performance insulation with a dense structure.
- Yield up to 3m² with 1.5cm thickness from one can if applied from a distance of ~40cm with normal application speed.
- Outstanding adhesion for most building materials.
- Easy to apply uneven, hard-to-reach surfaces where it is very hard to use traditional insulation materials.

PACKAGING:

- 750ml/can for gun type
- 15 cans/carton , 12 cans/carton, 6 cans/carton

SHELF LIFE:

12 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.

USES:

- Structural elements of buildings, attics, crawl space, interior wall insulation, balcony, loggia, doors, window slopes, pipes, canals, and tank kind round surfaces, uneven and rough all surfaces.
- Roofs, attics, facades, foundations, basements, floors, interior walls, inter-floor overlappings, interior partitions, ceilings, and cellars.
- Car body and car trailers, boats, yachts, vessels, and all kinds of sea vehicles.

LOTFIX® F35

PU WINTER FOAM

LOTFIX® F35 is an one-component ready-to-use polyurethane winter foam which to be used by gun or manually. It is moisture-curing and self-expanding, especially developed for applications at temperatures of as low as -10°C. Excellent filling capacity, and it provides excellent adhesion to most building materials.

KEY FEATURE:

- One component, ready-to-use.
- Excellent adhesion to most building materials (except PA, PE, silicone and Teflon).
- High yield, very good filling capacity.
- High thermal&acoustical insulation value.
- Stability and adequate pressure at frost temperatures.

PACKAGING:

- 750ml/can, 500ml/can
- 15 cans/carton , 12 cans/carton, 6 cans/carton

SHELF LIFE:

12 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.



USES:

- For mounting and insulating of door and window frames.
- Filling and sealing of gaps, joints and cavities.
- Filling of penetrations in walls.
- Improving thermal isolation in cooling systems.



LOTFIX® B2

B2

FIRE RETARDANT

PU FOAM

LOTFIX® B2 is an one-component self-extinguishable fire retardant polyurethane foam which to be used by gun or manually. It is B2 fire retardant class (according to DIN 4102-1 standards). And it is used for filling and sealing the frames and gaps, and especially the installation of fire doors. Also it has excellent bonding strength that adheres to the wide range of surfaces.

KEY FEATURE:

- One component, ready-to-use.
- B2 fire retardant grade (according to DIN 4102-1 standards).
- Good for filling and sealing with excellent mounting capacities, high thermal and acoustical insulation.
- Excellent adhesion to the wide range of surfaces.
- Environmentally friendly (CFC-free).

PACKAGING:

- 750ml/can, 500ml/can
- 15 cans/carton , 12 cans/carton, 6 cans/carton

SHELF LIFE:

12 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.

USES:

- For installing or mounting of door and window frames.
- For filling and sealing of gaps, joint and openings.
- For insulating the electrical outlets and water pipes.
- For bonging and fixing.

LOTFIX® B1

B1

FIRE RETARDANT

PU FOAM

LOTFIX® B1 is an one-component self-extinguishable fire retardant polyurethane foam which to be used by gun or manually. It is B1 fire retardant class (according to DIN 4102-1 standards). And it is used for filling and sealing the frames and gaps, and especially the installation of fire doors. Also it has excellent bonding strength that adheres to the wide range of surfaces.

KEY FEATURE:

- One component, ready-to-use.
- B1 fire retardant grade (according to DIN 4102-1 standards).
- Good for filling and sealing with excellent mounting capacities, high thermal and acoustical insulation.
- Excellent adhesion to the wide range of surfaces.
- Environmentally friendly (CFC-free).

PACKAGING:

- 750ml/can, 500ml/can
- 15 cans/carton , 12 cans/carton, 6 cans/carton

SHELF LIFE:

12 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.





LOTFIX®

PU FOAM CLEANER

LOTFIX® PU Foam Cleaner is special designed for removing the uncured polyurethane foam from foam gun and tools application. The adaptor may be used as a spray attachment, or the can may be connected to the gun to flush the barrel.

KEY FEATURE:

- Easy application, quick use.
- Powerful cleaning.
- Cleaner has a spray valve for removing the foam from the gun adapter.
- Propellant gas is not harmful to the ozone layer.

PACKAGING:

- 500ml/can
- 12 cans/carton

SHELF LIFE:

12 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.

LOTFIX® D5


GENERAL PURPOSE SILICONE SEALANT

LOTFIX® D5 is an one-component acetoxy cure general purpose silicone sealant for a range of general sealing and glazing applications. It is ready-to-use and waterproof, also it provides a good adhesion and suitable for use on common non-porous building materials.

KEY FEATURE:

- Acetoxy room temperature cure.
- Remains permanently elastic after curing.
- Remains flexible at low and high temperatures.
- Resistant to temperature extremes.
- Non slump, resists aging and cracking.
- Good primerless adhesion to most substrates.

STANDARD COLORS:



TRANSPARENT

WHITE

BLACK

SHELF LIFE:

10 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.





LOTFIX® D6

MULTI-PURPOSE SILICONE SEALANT

LOTFIX® D6 is an one-component acetoxy cure multi-purpose silicone sealant, excellent UV resistance and weathering characteristics, it is perfectly suited for both interior and exterior use. Also it is good for a range of general glass and glazing sealing, and offers excellent adhesion to a wide variety of building materials.


KEY FEATURE:

- Acetoxy cure, fast cure.
- Remains permanently elastic after curing.
- Cures to a strong, flexible seal capable of withstanding movement in and around the joint.
- Resistant to temperature extremes.
- Non slump, resists aging and cracking.
- Excellent primerless adhesion to most substrates.

USES:

- For interior and exterior use.
- Sealing around windows and doors.
- Sealing connection and expansion joints.
- Waterproofing various types of construction joints.

STANDARD COLORS:



TRANSPARENT WHITE BLACK

SHELF LIFE:

12 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.

LOTFIX® D7

PROFESSIONAL GRADE SILICONE SEALANT

LOTFIX® D7 is an one-component acetoxy cure professional grade all purpose silicone sealant, excellent UV resistance and weathering characteristics, it is perfectly suited for both interior and exterior use. Also it is good for a range of general glass and glazing sealing, and offers excellent adhesion to a wide variety of building materials.


KEY FEATURE:

- Acetoxy cure, fast cure.
- Forms a strong and durable seal after curing.
- Remains flexible at low and high temperatures.
- Resistant to temperature extremes.
- Non slump, resists aging and cracking.
- Excellent primerless adhesion to most substrates.

USES:

- For interior and exterior use.
- Sealing around windows and doors.
- Sealing connection and expansion joints.
- Waterproofing various types of construction joints.

STANDARD COLORS:



TRANSPARENT WHITE BLACK

SHELF LIFE:

12 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.





LOTFIX® D8

SANITARY SILICONE SEALANT

LOTFIX® D8 is an one-component acetoxy cure sanitary silicone sealant, it contains anti-fungal agent and specially designed for bathroom, kitchen and high humidity areas applications. Also it can be used for a range of general glazing sealing and provides an excellent adhesion and suitable for use on common non-porous building materials.

KEY FEATURE:

- Fast cure, anti-fungal.
- Remains elastic after curing.
- Remains flexible at low and high temperatures.
- Resistant to temperature extremes.
- Non slump, resists aging and cracking.
- Excellent primerless adhesion to most substrates.

USES:

- For high humidity areas uses.
- Sealing the joints of bathtubs, toilets, basins and countertops.
- Sealing around windows and doors.
- Waterproofing various types of construction joints.

STANDARD COLORS:



TRANSPARENT



WHITE



BLACK

SHELF LIFE:

12 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.

LOTFIX® D9

AQUARIUM SILICONE SEALANT

LOTFIX® D9 is an one-component acetoxy cure aquarium silicone sealant, high quality and excellent adhesion for use in aquarium construction and glazing applications. Also it is good for repairing glass fish tanks or securing rocks when aquascaping. and offers excellent performance to a wide variety of building materials.

KEY FEATURE:

- Acetoxy cure, fast cure.
- Remains permanently elastic after curing.
- Cures to a strong, flexible seal capable of withstanding movement in and around the joint.
- Very good bonding strength.
- Non slump, resists aging and cracking.
- Excellent primerless adhesion to most substrates.

USES:

- For aquarium and fish tanks.
- For glass panel and glazing applications.
- Sealing connection and expansion joints.
- Waterproofing various types of construction joints.

STANDARD COLORS:



TRANSPARENT



WHITE



BLACK

SHELF LIFE:

12 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.





LOTFIX® C11

NEUTRAL SILICONE SEALANT

LOTFIX® C11 is an one-component neutral cure universal silicone sealant for sealing the majority of porous and non-porous materials. It has good weather resistance, and it provides a good adhesion to glass, ceramics, steels, PVC, concretes, metals and the main building materials.


KEY FEATURE:

- Neutral cure, low odour.
- Outstanding weatherproofing ability and UV resistant.
- No seasonal limited for use.
- Resistant to temperature extremes.
- Non slump, resists aging and cracking.
- Good adhesion to most building materials.

USES:

- For interior and exterior use.
- Sealing the windows and doors frames.
- Sealing of construction joints where movement can occur.
- For general glazing and weather sealing in curtain walls or building façades.

STANDARD COLORS:



SHELF LIFE:

10 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.

LOTFIX® C12

WEATHERPROOF SILICONE SEALANT

LOTFIX® C12 is an one-component neutral cure weatherproof silicone sealant, it has excellent resistance to outdoor weathering, vibration, temperature extremes, and strong weatherproof seal on most common building materials like curtain wall, glass, aluminum, steels, bricks and concretes etc.

KEY FEATURE:

- Neutral cure, low odour.
- Outstanding weatherproofing ability and UV resistance.
- No seasonal limited for use.
- Resistant to temperature extremes.
- Non slump, resists aging and cracking.
- Excellent adhesion to most building materials.

USES:

- For use of glass, aluminum, steels, bricks and concretes etc.
- Sealing external aluminum composite panels.
- Sealing of construction joints where movement can occur.
- For general glazing and weather sealing in curtain walls or building façades.

STANDARD COLORS:



SHELF LIFE:

12 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.





LOTFIX® C13

BUILDING SILICONE SEALANT

LOTFIX® C13 is an one-component high quality 100% neutral cure building silicone sealant, it provides a permanent flexible, durable, weather sealing for applications in buildings. Also it has excellent weather resistance and excellent adhesion to most building substrates like glass, ceramic, aluminum and steels etc.


KEY FEATURE:

- Neutral cure, 100% silicone.
- Outstanding waterproofing and weatherproofing.
- No seasonal limited for use.
- Resistant to temperature extremes.
- Excellent tooling properties.
- Excellent primerless adhesion to many non-porous materials.

USES:

- For internal and external sealing applications.
- For perimeter sealing of doors, windows and cladding panels.
- For bonding and mending tasks where elastic gap filling bond is required.
- For applications with high weather sealing requirements in building.

STANDARD COLORS:



SHELF LIFE:

12 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.

LOTFIX® C14

STRUCTURAL SILICONE SEALANT

LOTFIX® C14 is an one-component high-strength neutral cure structural silicone sealant, it is specifically formulated for structural glazing applications. It has excellent weather resistance and excellent adhesion to most building substrates.


KEY FEATURE:

- Neutral cure, low odour.
- Outstanding weather, UV and ozone resistance.
- No seasonal limited for use.
- Resistant to temperature extremes.
- Excellent tooling properties.
- Excellent adhesion to most building materials.

USES:

- For field glazing of curtain wall modules
- For seal in glass-to-glass butt joints.
- Sealing and bonding in building construction and structure engineering.
- Seal seams and gaps between building components such as windows, doors, and curtain walls.

STANDARD COLORS:



SHELF LIFE:

12 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.





LOTFIX® C15

MIRROR SILICONE SEALANT

LOTFIX® C15 is an one-component high-strength neutral cure mirror silicone sealant, it has strong flexible bonding ability for mirrors to tiles, wood, walls, cabinets and metals, and it provides long-term use because it does not cause corrosion in mirrors, and the consistency and color also allow to seal the edges of mirrors.

KEY FEATURE:

- Neutral cure, low odour.
- Non-Corrosive, durable.
- Suitable for use in sanitary applications.
- Resistant to ozone, UV and temperature extremes.
- Excellent resistance to heat and humidity.
- Excellent adhesion to most materials and surfaces.

USES:

- Mounting of decorative mirrors on different surfaces, e.g. glaze, plaster, tile etc.
- Bonding mirrors in the metal, wood or plastic frames.
- Suitable for emergency DIY sealing and bonding tasks in and around the house.

STANDARD COLORS:



TRANSPARENT

SHELF LIFE:

12 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.

LOTFIX® C16

ROOF & GUTTER SILICONE SEALANT



LOTFIX® C16 is an one-component neutral cure roof and gutter silicone sealant, it is waterproof and weather resistant, it has excellent adhesion for common construction materials and provides long-term use because it does not cause corrosion in bare metals.

KEY FEATURE:

- Neutral cure, low odour.
- Non-Corrosive, Durable.
- Waterproof and weather resistant.
- No seasonal limited for use.
- Resistant to ozone, UV and temperature extremes.
- Excellent adhesion to most building materials.

USES:

- Metal roofing systems and plumbing applications.
- Metal water tanks (not immersion).
- Flashings and down pipes.
- Sheet metal fabrication.
- Metal water tanks (not immersion).

STANDARD COLORS:



TRANSPARENT



WHITE



BLACK

SHELF LIFE:

12 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.



LOTFIX® IG188

TWO PARTS INSULATING-GLASS SILICONE SEALANT

LOTFIX® IG188 is a two-component neutral cure insulating-glass silicone sealant, specifically designed for installation and fixation of insulating-glass. It's high modulus and high strength to meet the assembly requirements of insulating glass. Excellent weather resistance, high temperature resistance and good adhesion.

KEY FEATURE:

- Neutral cure, high modulus.
- Non-Corrosive, durable.
- Good anti-aging and anti-high and low temperature properties.
- High modulus, strength and adhesive property to meet the demand of the installation and fixation of insulating-glass.
- Excellent adhesion to most materials and surfaces.

USES:

- Suitable for secondary adhesion and sealing of insulating-glass.

PACKAGING & COLORS:

--Part A: 190L Part B: 19L
--Part A: White Part B: Black
It's Black color after mixture

SHELF LIFE:

12 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.

LOTFIX® SG199

TWO PARTS STRUCTURAL SILICONE SEALANT

LOTFIX® SG199 is a two-component neutral cure structural silicone sealant, high in strength, capable of bearing large loads, and resistant to aging, fatigue, and corrosion, and have stable performance within the expected lifespan. They are suitable for adhesives that withstand the bonding of structural parts, and can partially replace traditional connection forms such as welding, riveting and bolting.

KEY FEATURE:

- Neutral cure, high modulus.
- Non-Corrosive, durable.
- Excellent resistance to weather, and the guarantee is over 50 years in the condition of general weather;
- Excellent resistance to low and high temperature change. Little changes of performance at 40~150°C,
- Excellent adhesion to most materials and surfaces without priming.

PACKAGING & COLORS:

--Part A: 190L Part B: 19L
--Part A: White Part B: Black
It's Black color after mixture

USES:

- For structural glazing in glass, stone (marble, granite), aluminum curtain wall, glass roof and metal structure engineering.
- As a secondary edge adhesive sealant.

SHELF LIFE:

12 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.





LOTFIX® H315

HIGH TEMP. SILICONE SEALANT

LOTFIX® H315 is an one-component neutral cure high temperature silicone sealant, it can withstand high temperatures up to 315°C after full curing. And this unique formula offers tenacious adhesion to form waterproof and airtight bonds to materials in high temperature scenarios.

KEY FEATURE:

- Neutral cure, low odour.
- Non-Corrosive, Durable.
- Excellent sealing and waterproof ability.
- High temperature resistance up to 315°C.
- Resistant to ozone, UV and temperature extremes.
- Excellent adhesion to most building materials.

USES:

- Automotive -- Replace many gaskets for Automotive, Industrial and Marine Engines e.g. Oil Pan, Water Pump, Hose Outlets, Valve Cover, Timing Gear Cover, Thermostat Housing and so on.
- Industrial -- Repairs plumbing leaks insulates electrical wiring, repairs rubber parts. Bonds to many types of materials such as wood, glass, metal, ceramic, plastic, concrete and so on.

STANDARD COLORS:



IRON RED



GREY

SHELF LIFE:

12 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.

LOTFIX® A101

ACRYLIC SEALANT

LOTFIX® A101 is an one component permanently flexible acrylic sealant, fast-drying and paintable. Excellent for sealing indoor and outdoor joints and connections on surfaces, such as plaster, concrete, masonry, aluminium, zinc, PVC and wood.

KEY FEATURE:

- Paintable, easy to use and clean up.
- Good fluidity in a wide temperature range.
- Good elasticity and good weather resistance once cured.
- Good adhesion and waterproof.
- Non-toxic and harmless.
- Low VOC, environmental friendly.

USES:

- For interior and exterior use.
- Sealing cracks in plaster, concrete, brick work and wood.
- Sealing joints between metal and wooden window frames, skirting boards, window- sills, ceilings etc.

STANDARD COLORS:



WHITE



BLACK

SHELF LIFE:

12 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.





LOTFIX® M202

MS POLYMER SEALANT

LOTFIX® M202 is a high bond strength, single component MS polymer sealant with high levels of elasticity. It is quick and easy to use, with primerless adhesion available on most surfaces, suitable for sealing and bonding in interior decoration, also it has a good waterproof and anti-mildew ability.


KEY FEATURE:

- Good waterproof and anti-mildew ability.
- Paintable, high levels of elasticity.
- Excellent bonding to a wide range of materials.
- No pollution, environmental friendly.

USES:

- For applications of sealing and bonding in interior.
- For bathroom and kitchen applications.
- For decorative water feature sealing.
- Bonding the skirting board to the wall.
- Sealing the gaps around door and window frames.

STANDARD COLORS:



SHELF LIFE:

9 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.

LOTFIX® L303

LIQUID NAILS ADHESIVE

LOTFIX® L303 is a high strength multipurpose liquid nails construction adhesive, water-based formulation and low odour. And it forms a strong and lasting bond on most building substrates, such as timber, plasterboard, particleboard, masonry, concrete, tiles, ceramics and plastics.

KEY FEATURE:

- Easily extruded and easy to use.
- Paintable when dry, suitable for interior & exterior use.
- Excellent adhesion for most building substrates.
- Low odour, environmental friendly.

USES:

- Bonding sheet flooring to joists.
- Bonding timber or fibre cement sheeting to cement block or brick walls.
- Bonding metal or aluminium door strips to floors or walls.
- Bonding tempered hardboard to floorboards.

STANDARD COLORS:



SHELF LIFE:

9 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.





LOTFIX® P55

PU

WINDSHIELD SEALANT

LOTFIX® P55 is one-component moisture curable polyurethane sealant. It has excellent bonding and sealing performance. No corrosion and pollution to substrates, environment friendly, no bubbles during application, smooth and fine appearance etc.

KEY FEATURE:

- One component, easy to use.
- Excellent softness after curing, easy to cut, convenient for replacement.
- Excellent bonding performance, primer-less.
- Excellent extrudability and thixotropy, non-sag.

USES:

- Suitable for windshield and side & back window glass bonding.

PACKAGING & COLORS:



BLACK

SHELF LIFE:

9 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.

LOTFIX® P65

PU

CONSTRUCTION SEALANT

LOTFIX® P65 is one-component, moisture curable polyurethane construction sealant. It has good sealing and flexible performance., no corrosion and pollution to base materials. Also it is pricking resistance, easy for repairing, and good bonding with cement and stone.

KEY FEATURE:

- One component, easy to use.
- Excellent extrusion, no-sag.
- Low modulus, high movement resistance
- Excellent extrudability and thixotropy, non-sag.

USES:

- Suitable for sealing joint of underground tunnel, bridge tunnel, drains, sewage pipes, epoxy floor, concrete internal walls. Suitable for sealing of various holes in walls and floor slab.

STANDARD COLORS:



WHITE



BLACK

SHELF LIFE:

9 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight.





LOTFIX®

SUPER GLUE

LOTFIX® SUPER GLUE is an one-component cyanoacrylate liquid, medium viscosity and fast curing, it provides a strong, long lasting bond and works on a lots of materials, such as metal, plastic, wood, paper, leather, rubber, ceramics etc.

KEY FEATURE:

- One component, easy to use.
- Fast curing and fast fixing.
- Excellent adhesive for a lot of materials.
- Can be used in low temperatures.

USES:

- For bonding of metal, plastic, wood, paper, leather, rubber, ceramics etc. materials.

PACKAGING:

-- 3g / 10g / 20g / 50g / 100g

Standard Color: Clear

Contact us for other weights needed

SHELF LIFE:

18 months when stored in cool, dry conditions, keep away from direct sunlight. For optimum storage stability refrigerate to 5°C.

LOTFIX®

MDF KIT



LOTFIX® MDF KIT (Fast Adhesive) is consisted of one cyanoacrylate and one aerosol activator. It has quite powerful adhesion strength and features prompt initial bonding. It is used in numerous areas requiring fast adhesion such as indoors and outdoors, at home, workplace, manufacturing workshops, toy repairing etc. And for the application of decorative products.

KEY FEATURE:

- Widely used, easy bonding.
- Fast adhesive in 3~5 seconds.
- Can be used in low temperatures.
- Excellent adhesive for a lot of materials.

USES:

- Used for fast and easy bonding and adhesion in just a few seconds for MDF edge assembly and bonding, wood, metal, aluminum, marble, concrete, stone, granite, ceramics, molding, natural stone, polyurethane materials, leather and many hard plastic products.

PACKAGING:

-- 200ml+50g, 400ml+100g

Standard Color: Clear

Contact us for other weights needed

SHELF LIFE:

24 months when stored in cool, dry conditions, keep away from direct sunlight. For optimum storage stability refrigerate to 5°C.



LOTFIX®

SPRAY PAINT

LOTFIX®

APPLICATION GUN SERIES

LOTFIX® SPRAY PAINT is acrylic aerosol paint in solvent formula. Fast drying, good adhesion and excellent weather-resistant performance. It forms to a smooth appearance, and with an excellent paint film performance.

KEY FEATURE:

- Ready-to-use, easy application.
- Fast drying, excellent coverage.
- Smooth appearance after use, good color rendering.
- Superior adhesion and excellent stability.
- Can be used in interior and exterior.

PACKAGING:

- 400ml/can
- Weight according to customer requirements
- Contact us for color card*

SHELF LIFE:

36 months when stored in cool, dry conditions between +5°C to +25°C, keep away from direct sunlight and heat source.

USES:

- Widely used on surface of metal, ABS plastic, wooden materials etc. Suitable for indoor and outdoor use. Good option for decoration, appearance repairing and DIY use.



Model: FG201

Product Name: PU Foam Gun

Material: Aluminum alloy, stainless steel, plastics



Model: FG205

Product Name: PU Foam Gun

Material: Aluminum alloy, stainless steel



Model: FG207

Product Name: PU Foam Gun

Material: Aluminum alloy, stainless steel, plastics



Model: CG318-1

Product Name: Sealant Gun

Material: Aluminum alloy, iron



Model: CG330-4

Product Name: Sealant Gun

Material: Aluminum alloy, iron



Model: CG337-1A

Product Name: Sealant Gun

Material: Aluminum alloy, iron

Applicable: 590ml